

CTX ANSI Single Seals

Standard Cartridge Seals



Product Description

- 1. Single seal configuration
- 2. Balanced design
- 3. Independent of direction of rotation
- 4. Cartridge construction
- 5. Available for standard (CTX-ASP) and big bore (CTX-ABPN) seal chambers
- 6. Single seals with flush (-ASP, -ABPN) and with quench combined with lip seal (-ASQN, - ABQN) or throttle ring (-ASTN, -ABTN)

Technical Features

- 1. Ideal for use in ANSI process pumps
- 2. O-ring is dynamically loaded to prevent shaft damage.
- 3. Dimensional modification of the stuffing box chamber is not required due to short radial installation height
- 4. Ideal to convert and retrofit pumps with packings and large volume OEM production
- 5. Cartridge unit factory assembled for easy installation, which reduces down-time
- 6. Rugged design for long operating life

Typical Industrial Applications

ANSI process pumps	Hydrocarbons
Acids	Lubricating liquid
Aqueous solutions	Marine
Caustics	Petrochemical
Chemicals	Pharmaceutical
Crystallizing fluids	Solvents
Fertilizer	Water and waste water
Food and beverage	

Standards

ANSI

Materials


Seal face:	Silicon carbide (Q1), Carbon graphite resin impregnated (B), Tungsten carbide (U2)
Seat:	Silicon carbide (Q1)
Secondary seals:	FKM (V), EPDM (E), FFKM (K), Perfluorocarbon rubber/PTFE (U1)
Springs:	Hastelloy® C-4 (M)
Metal parts:	CrNiMo steel (G), CrNiMo cast steel (G)

Performance Capabilities

CTX-ASP, -ABPN, -ASTN, -ABTN, -ASQN, -ABQN	
Sizes:	d ₁ = 1.000" ... 3.750"
Other sizes on request	
Temperature:	t = -40°C...+220°C (-40°F...+428°F) (Check O-ring resistance)
Sliding face material combination BQ1	
Pressure:	p ₁ = 25 bar (363 PSI)
Speed:	= 16 m/s (52 ft/s)
Sliding face material combination Q1Q1 or U2Q1	
Pressure:	p ₁ = 12 bar (175 PSI)
Speed :	= 10 m/s (33 ft/s)

Permissible Axial Movement:


± 1.0mm, d₁ = 75 mm ± 1.5 mm

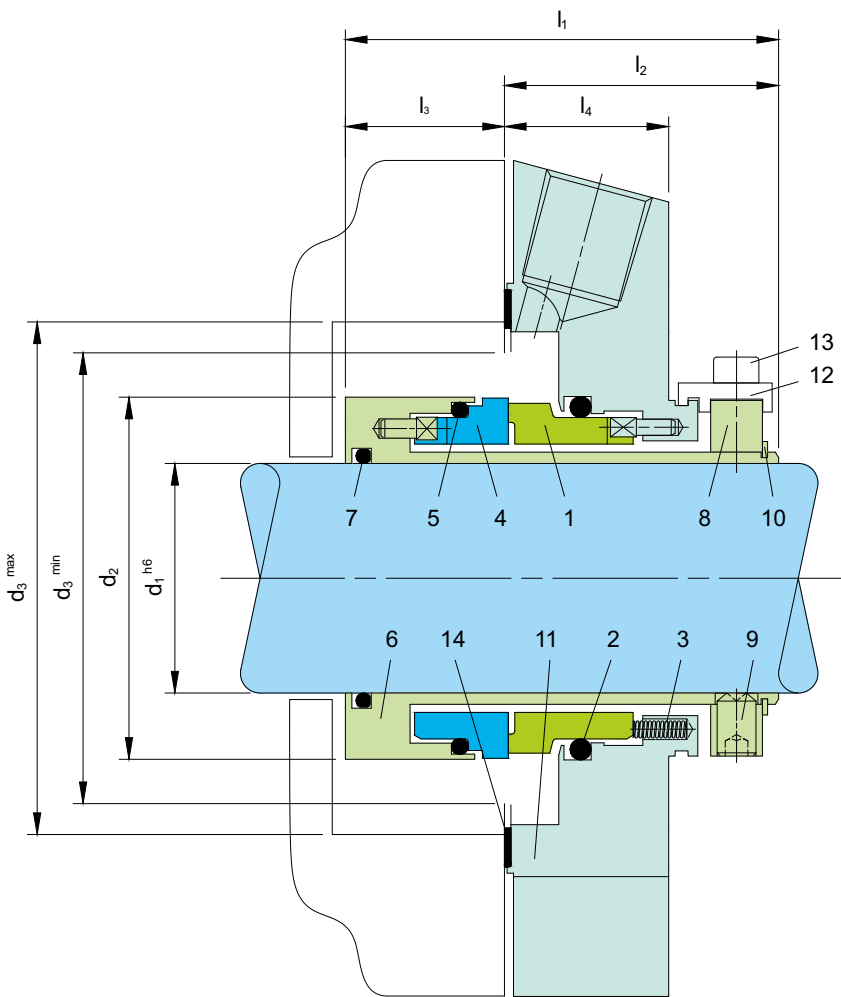



Note: The item numbers as depicted above are based on our technical experience and knowledge and are placed in the chronological order of their assembly procedure.

Item	Description	Item	Description
1	Seal face	10	Snap ring
2, 5, 7	O-ring	11	Cover
3	Spring	12	Assembly fixture (remove after installation)
4	Seat	13	HSH Cap Screw
6	Shaft sleeve	14	Gasket
8	Drive collar	16	Lip seal (-QN), throttle ring (-TN)
9	Set screw		

Installation, Details, Options

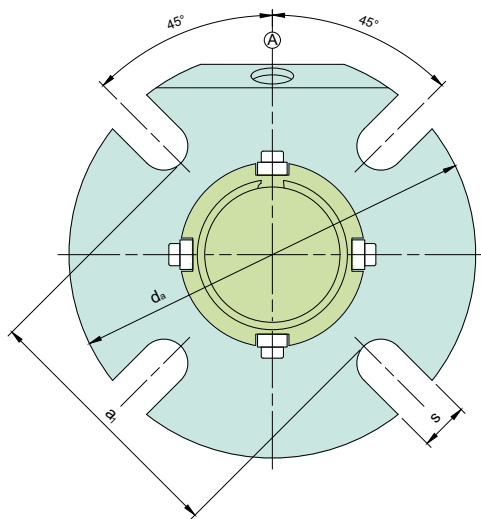

Product Variants

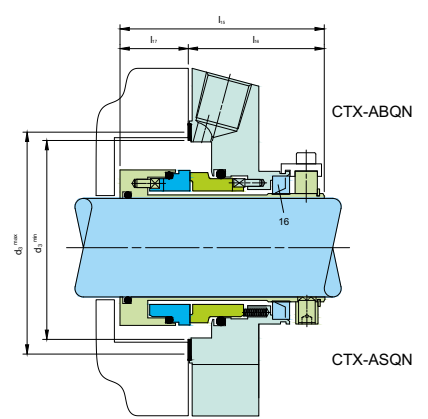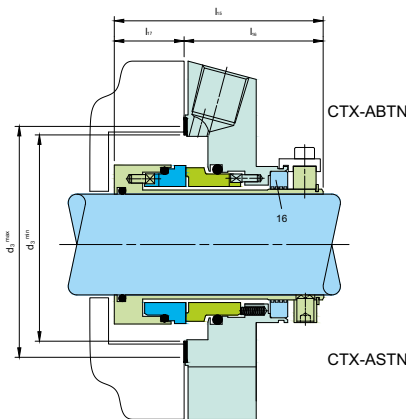

CTX-ASTN and -ABTN

Single seal for operation with unpressurized quench for standard (S) and big bore (B) seal chambers. Same as CTX-ASPN and -ABPN but with throttle ring (item 16). The cover has auxiliary connections for flushing and quench. Throttle ring: PTFE carbongraphite reinforced (T12).

CTX-ASQN and -ABQN

Single seal for operation with unpressurized quench for standard (S) and big bore (B) seal chambers. Same as CTX-ASPN and -ABPN version but with lip seal (item 16) at the atmospheric side. The cover has auxiliary connections for flushing and quench. Lip seal: NBR (P), FKM (V), PTFE carbon reinforced (T3)

Dimensional Data

BIG BORE : Dimensions in inch

d ₁	d ₂	d ₃ min	d ₃ max	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	l ₇	a ₁	d _a	s	Connection
1.000	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.125	1.713	1.752	2.795	2.638	1.669	0.969	1.000	2.937	1.909	1.028	3.311	4.500	0.437	1/4 NPT
1.250	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.375	1.960	2.000	3.189	2.638	1.669	0.969	1.000	2.947	1.919	1.028	3.543	5.118	0.437	1/4NPT
1.500	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.625	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.750	2.461	2.500	4.055	2.638	1.669	0.969	1.000	3.012	1.984	1.028	4.567	6.496	0.559	3/8 NPT
1.875	2.583	2.661	3.937	2.638	1.669	0.969	1.000	3.071	2.059	1.012	4.409	5.984	0.551	3/8 NPT
2.000	2.677	2.756	4.567	2.638	1.929	0.709	1.000	3.130	2.102	1.028	4.882	6.260	0.551	3/8 NPT
2.125	2.834	2.913	4.528	2.638	1.945	0.639	1.276	3.012	1.984	1.028	5.276	6.890	0.709	3/8 NPT
2.250	2.960	3.093	4.409	2.638	1.945	0.693	1.276	3.130	2.102	1.028	4.685	6.417	0.709	3/8 NPT
2.500	3.212	3.299	5.276	2.638	1.919	0.719	1.250	3.130	2.102	1.028	5.512	7.795	0.709	3/8 NPT
2.625	3.338	3.170	5.118	2.638	1.919	0.719	1.250	3.130	2.102	1.028	5.354	6.890	0.709	3/8 NPT
2.750	3.660	3.740	5.236	2.638	1.945	0.693	1.276	3.130	2.102	1.028	5.512	7.480	0.630	3/8 NPT
3.000	3.937	4.016	5.512	3.307	2.276	1.031	1.276	3.858	2.516	1.343	5.906	8.228	0.650	3/8 NPT
3.250	-	-	-	-	-	-	-	-	-	-	-	-	-	-

STANDARD BORE : Dimensions in inch

d ₁	d ₂	d ₃ min	d ₃ max	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	l ₇	a ₁	d _a	s	Connection
1.000	1.693	1.732	2.205	2.638	1.669	0.969	1.000	2.937	1.909	1.028	2.756	3.937	0.433	1/4 NPT
1.125	1.713	1.752	2.205	2.638	1.669	0.969	1.000	2.937	1.909	1.028	2.440	4.134	0.437	1/4 NPT
1.250	1.969	2.008	2.402	2.638	1.669	0.969	1.000	3.130	2.102	1.028	2.638	4.252	0.433	1/4 NPT
1.375	1.961	2.000	2.402	2.638	1.669	0.969	1.000	2.947	1.919	1.028	2.760	4.213	0.437	1/4 NPT
1.500	2.200	2.244	2.717	2.638	1.669	0.969	1.000	3.130	2.102	1.028	2.950	4.488	0.551	3/8 NPT
1.625	2.340	2.421	2.795	2.638	1.669	0.969	1.000	3.130	2.102	1.028	3.030	4.921	0.551	3/8 NPT
1.750	2.461	2.500	2.953	2.638	1.669	0.969	1.000	3.012	1.984	1.028	3.228	5.118	0.559	3/8 NPT
1.875	2.583	2.661	3.070	2.638	1.669	0.969	1.000	3.071	2.043	1.028	3.190	5.118	0.551	3/8 NPT
2.000	2.677	2.756	3.189	2.638	1.669	0.969	1.000	3.130	2.102	1.028	3.430	5.472	0.630	3/8 NPT
2.125	2.834	2.913	3.583	2.638	1.669	0.969	1.000	3.012	1.984	1.028	3.820	5.512	0.650	3/8 NPT
2.250	2.960	3.039	3.583	2.638	1.669	0.969	1.000	3.130	2.102	1.028	3.858	5.866	0.650	3/8 NPT
2.375	3.070	3.125	3.590	2.638	1.669	0.969	1.000	-	-	-	4.020	6.181	0.709	3/8 NPT
2.500	3.212	3.291	3.937	2.638	1.669	0.969	1.000	3.130	2.102	1.028	4.528	6.693	0.709	3/8 NPT
2.625	3.338	3.417	4.016	2.638	1.669	0.969	1.000	3.130	2.102	1.028	4.528	6.378	0.630	3/8 NPT
2.750	3.660	3.740	4.370	2.638	1.929	0.709	1.260	3.130	2.102	1.028	4.646	7.480	0.709	3/8 NPT
3.000	3.937	4.016	4.724	3.307	2.260	1.047	1.000	3.858	2.516	1.343	5.000	7.835	0.709	3/8 NPT
3.250	4.189	4.268	4.921	3.307	2.260	1.047	1.000	3.858	2.516	1.343	5.315	7.830	0.709	3/8 NPT
3.750	4.689	4.750	5.433	3.307	2.260	1.047	1.000	-	-	-	5.827	8.189	0.866	3/8 NPT

Note: Additional technical & dimensional information will be provided on request.

The specifications, drawings, images etc included in this catalogue are intended to be generic and must be interpreted as equivalent or functionally equivalent, more specifically the performance capabilities mentioned in this catalogue is based on optimum values, however the performance of the product is dependent on size, material of construction, media, pressure, temperature, sliding velocity etc and it shall vary from size to size or application to application. Customers are requested to consult with Sealmatic before employing the product from this catalogue for any application.