


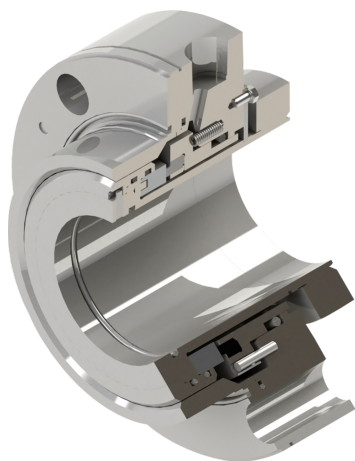


Product Description

1. Single seal configuration
2. Balanced design
3. Independent of direction of rotation
4. Cartridge construction
5. Stationary design with multiple springs
6. Designed with integrated pumping device for increased efficiency in circulation
7. Robust construction with shrink-fitted seal face
8. Heavy duty design of solid stationary seat

Technical Features

1. Accommodates shaft deflections due to stationary design
2. Can be designed for individual pump application with corresponding connection parts to be adopted to the pump seal chamber
3. Optimum heat dissipation due to integrated pumping device available for increased efficiency in circulation and optimized seat design
4. Cartridge unit factory assembled for easy installation, which reduces down-time
5. Trouble-free long-term operation due to heavy duty single seat design with bandage
6. Can operate under high sliding velocities and high pressures

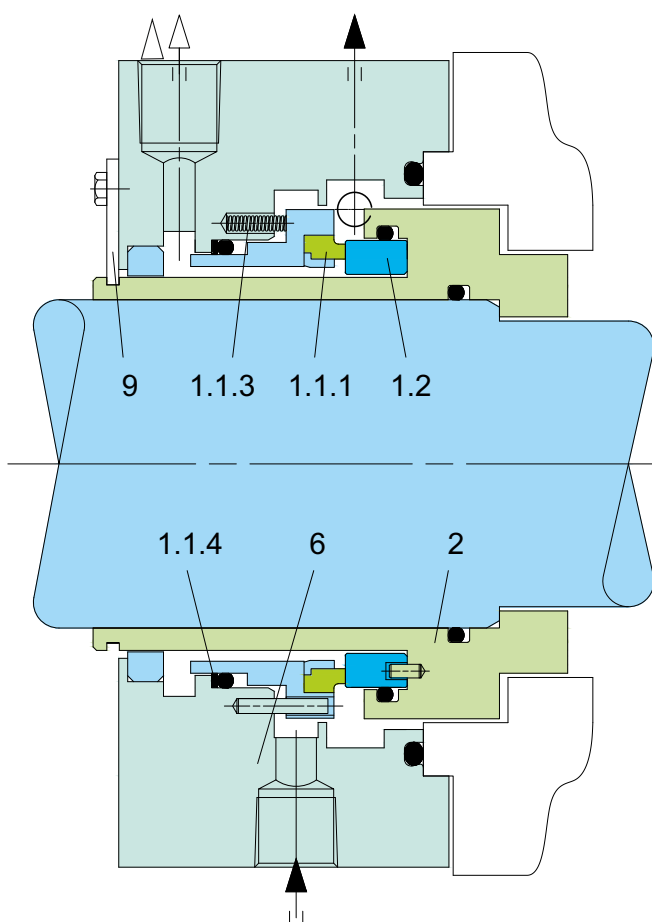

Note: The item numbers as depicted above are based on our technical experience and knowledge and are placed in the chronological order of their assembly procedure.

Item	Description
1.1.1	Seal face pressure-stabilized
1.1.3	Spring
1.1.4	Back-up ring
1.2	Seat
2	Seat housing with pumping screw (F) or pumping ring (P)
6	Cover
9	Assembly fixture

Typical Industrial Applications

Amines	Multi-phase pumps
Caustic soda	Oil & gas
Chemical	Process water
Crude oil	Refining technology
Crystallizing media	Sour water
Feed pumps	Volatile & non-volatile hydrocarbons
Hot water	
Injection pumps	

Standards

API 682 / ISO 21049

Performance Capabilities

Sizes:	d_1^* = Upto 250 mm (Upto 10.000")
Pressure:	p_1 = 150 bar (2,175 PSI)
Temperature:	t = 300 °C (572 °F)
Speed:	= 60 m/s (197 ft/s)
* Other sizes on request	

Permissible Axial Movement

± 3 mm

Materials

Seal face:	SiC-C-Si Silicon impregnated, Carbon(Q3), Carbon graphite antimony impregnated (A)
Seat:	Silicon carbide (Q)
Secondary seals:	FKM (V), EPDM (E), FFKM (K)
Springs:	Hastelloy® C-4 (M)
Metal parts:	CrNiMo steel (G), Duplex (G1), Super Duplex (G4), Pure Titanium (T2), Hastelloy® C-4 (M)

Design Variations

SBFV

Same design as SBPV but with pumping screw