

UFLWT Single Seals

Standard Mechanical Seals - Metal Bellows Seals



Product Description

1. Single seal configuration
2. Balanced design
3. Independent of direction of rotation
4. For plain shafts
5. Rotary metal bellows design

Technical Features

1. Suitable for very high temperature application
2. No dynamically loaded O-ring
3. Pumping screw for media with higher viscosity also available
4. Short installation length possible
5. Rugged design for long operating life
6. Bellows design efficiently ensure self-cleaning


Typical Industrial Applications

Chemical industry
Highly viscous media
Hot media
Power plant technology
Refining technology

Design Variations

UFLWT900

Shaft diameter: d_1 = Upto 150 mm (Upto 6.000")
Internally pressurized: p_1 = ... 16 bar (232 PSI)
Externally pressurized: p_1 = 10 bar (145 PSI)
Temperature: t = -20°C...+400°C (-4°F...+752°F)
stationary seat lock necessary.
Speed: = 20 m/s (66 ft/s)

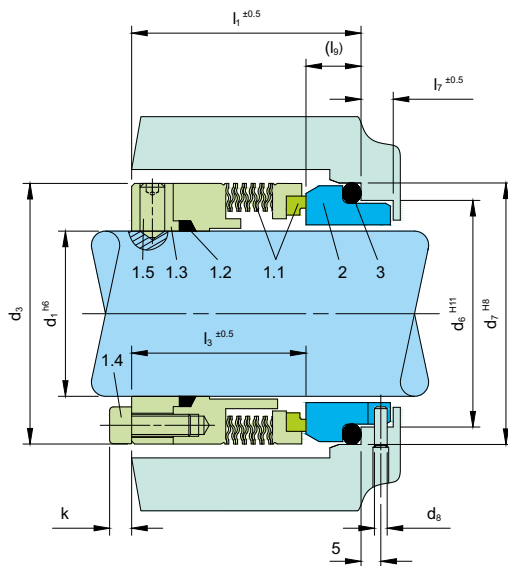

Note: The item numbers as depicted above are based on our technical experience and knowledge and are placed in the chronological order of their assembly procedure.

Materials

Seal face:	Carbon graphite antimony impregnated(A), Silicon carbide(Q12)
Seat:	Silicon carbide (Q1)
Bellows:	Inconel® 718 hardened (M6), Hastelloy® C-276 (M5)
Metal parts:	CrNiMo steel (G), Duplex (G1), Carpenter® 42 (T4), Hastelloy® C-4 (M)

Performance Capabilities

Sizes:	d Upto 150 mm (Upto 6.000")
Externally pressurized:	p_1 = ... 25 bar (363 PSI)
Internally pressurized:	p_1 <120 °C (248 °F) 10 bar (145 PSI)
	p_1 <220 °C (428 °F) 5 bar (73 PSI)
	p_1 <400 °C (752 °F) 3 bar (44 PSI)
Stationary seat lock necessary	
Temperature:	t = -20 °C...+400 °C (-4 °F...+752 °F)
Speed:	20 m/s (66 ft/s)

DIN 24250

Dimensional Data

Dimensions in millimeter

	d ₁	d ₃	d ₆	d ₇	d ₈	l ₁	l ₃	l ₅	l ₆	l ₇	l ₈	l ₉	f	k	m _x
16	38	29.0	35.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M5
18	40	31.0	37.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M5
20	42	34.0	40.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M5
22	44	37.0	43.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M5
24	46	37.0	43.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M5
25	47	39.0	45.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M5
28	50	42.0	48.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M6
30	52	44.0	50.0	3	58.0	46.5	2.0	5	9	19.5	11.5	5	5	5	M6
32	54	49.0	56.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5	5	5	M6
33	55	49.0	56.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5	5	5	M6
35	57	51.0	58.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5	5	5	M6
38	60	54.0	61.0	4	60.5	46.5	2.0	6	9	22.0	14.0	5	5	5	M6
40	66	56.0	63.0	4	61.5	47.5	2.0	6	9	22.0	14.0	5	6	6	M6
43	69	59.0	66.0	4	61.5	47.5	2.0	6	9	22.0	14.0	5	6	6	M6
45	71	62.0	70.0	4	62.5	47.5	2.5	6	9	23.0	15.0	5	6	6	M6
48	74	65.0	73.0	4	62.5	47.5	2.5	6	9	23.0	15.0	5	6	6	M6
50	76	67.0	75.0	4	62.5	47.5	2.5	6	9	23.0	15.0	5	6	6	M6
53	79	70.0	78.0	4	62.5	47.5	2.5	6	9	23.0	15.0	5	6	6	M6
55	81	72.0	80.0	4	62.5	47.5	2.5	6	9	23.0	15.0	5	6	6	M6
58	85	75.0	83.0	4	68.0	53.0	2.5	6	9	23.0	15.0	5	6	6	M6
60	87	77.0	85.0	4	68.0	53.0	2.5	6	9	23.0	15.0	6	6	6	M8
63	90	81.0	90.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6	6	6	M8
65	92	83.0	92.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6	6	6	M8
68	95	88.0	97.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6	6	6	M8
70	97	88.0	97.0	4	71.0	53.0	2.5	7	9	26.0	18.0	6	6	6	M8
75	102	95.0	105.0	4	71.0	52.8	3.0	7	9	26.2	18.2	6	6	6	M8
80	107	100.0	110.0	4	71.0	52.8	3.0	7	9	26.2	18.2	6	6	6	M8
85	112	105.0	115.0	4	71.0	52.8	3.0	7	9	26.2	18.2	6	6	6	M8
90	117	110.0	120.0	4	71.0	53.8	3.0	7	9	25.2	17.2	6	6	6	M8
95	122	115.0	125.0	4	71.0	53.8	3.0	7	9	25.2	17.2	6	6	6	M8
100	127	122.2	134.3	5	74.0	54.0	3.0	9	11	30.0	20.0	6	6	6	M8

inch size available from size 0.625 to 4.000

Note: Additional technical & dimensional information will be provided on request.

The specifications, drawings, images etc included in this catalogue are intended to be generic and must be interpreted as equivalent or functionally equivalent, more specifically the performance capabilities mentioned in this catalogue is based on optimum values, however the performance of the product is dependent on size, material of construction, media, pressure, temperature, sliding velocity etc and it shall vary from size to size or application to application. Customers are requested to consult with Sealmatic before employing the product from this catalogue for any application.